

intelligent light
ADALIT

L-3000

PROFESSIONAL safety torch







| Product Information
| Functional Features

L-30


Ex II 1G Ex ia IIC T4 Ga
II 1D Ex ia IIIC T85 °C Da

HIGH INTENSITY  

0°
45°
90° 

200 LUMENS  200 M  10000 CD 

 **Li-ion RECHARGEABLE**

 04 h 06 h 08 h

IP67  **2m** 

 **Technology**
LedEngine



**Product
Information**

**Functional
Features**





Adalit L.3000 torch is a high performance professional safety torch that combines high intensity LEDs, a revolutionary optic, a large digital display and an elegant design.



- ✓ 2 LEDs of 135 lumens each in a double optic with different light beams.
- ✓ LedEngine technology with a step light system.
- ✓ Only focused light on, "Booster" function to illuminate long distances with greater penetrating light beam.
- ✓ Two button switches of soft touch material, ergonomic and oversized in order to guarantee easy pushing.
- ✓ 3 different burning intensities in order to select in every moment the remaining burning time.
- ✓ Battery level indication in hours and minutes by means of a digital display.
- ✓ Swivelling head with 3 positions 0° | 45° | 90°
- ✓ Torch body made of high resistance thermoplastic resin to the impacts, extreme temperatures and corrosion.

intelligent light

PROFESSIONAL

Ex



Led Engine
Technology

HIGH INTENSITY



ATEX
ZONE 0




Technology
LedEngine

New step lighting
system, now you can
watch your step



Functional Features

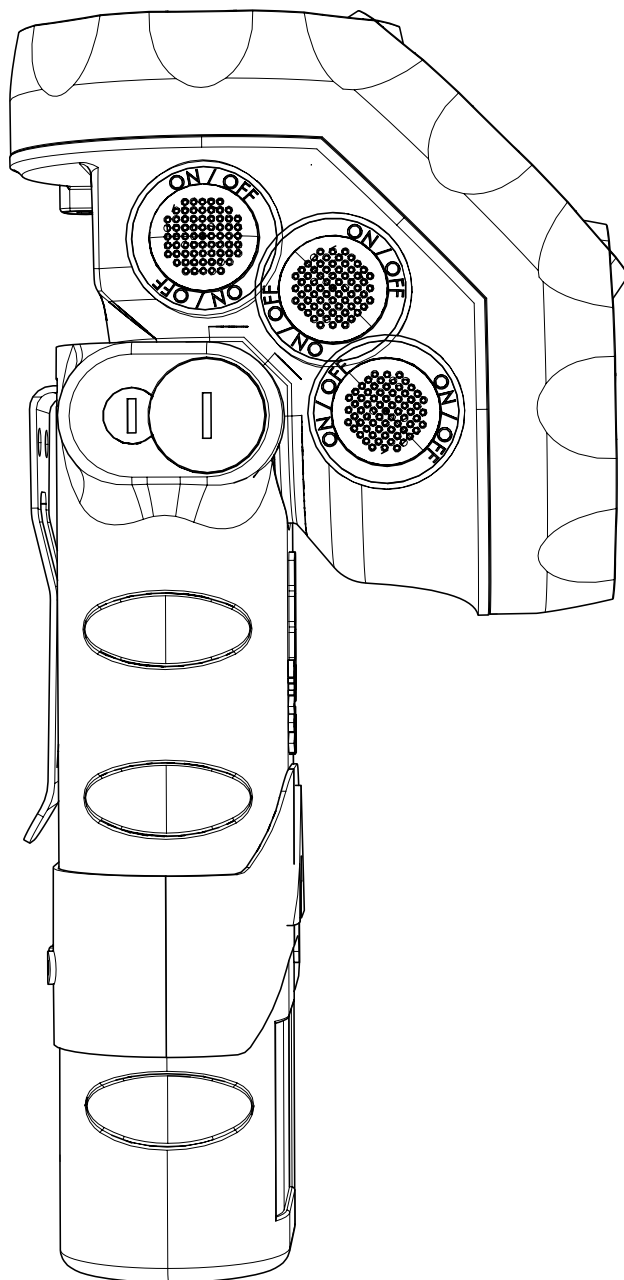

Adalit L3000 Torch

ATEX Certificate LOM 12ATEX2087 X

II 1G Ex ia IIC T4 Ga IP67 | II 1D Ex ia IIIC T85 °C Da

Ingress Protection: IP67

Weight: 500 g.

Measures: 225 x 70 mm (L x Diam. Ø)

Burning Time System

3 different intensity levels that can be chosen by the user in order to choose the correct burning time in every moment with a minimum of 4 hours use of maximum intensity, 6 in the intermediate and 8 hours at the minimum.

Burning time Real time in hours and minutes thanks to the digital display.

Low Battery Warning

Blinking signal of the main LED 15 min. before the batteries get off.

Material

High resistance thermoplastic resin to the impacts, extreme temperatures and corrosive substances. Two button switches of soft touch material, ergonomic and oversized in order to guarantee easy pushing.

Swivelling Head 3 positions: 0° / 45° / 90°.

Lighting Source: 2 high intensity LED's with 135 lm. | Total light intensity 200 lm.

Special Double Optics

FLOOD light on - the unique "step lighting system" to light the ground area just ahead user's feet. FOCUSED light on - "BOOSTER" function to illuminate long distances with a greater penetrating light beam.

Battery: Type: Lithium | Voltage: 3,7 V.

Accessories: Holster, Nylon with high visibility | Magnet with high pull strength.

Chargers

Marking: CE e9

Ingress Protection: IP54

Disconnection at the end of the charge: Automatic

Charge Indication: Red LED: charging | Green LED: charged

Feeding Source: DC: 12 V. / 24 V. | AC: 100/240 V. 50/60 Hz

Type and Dimensions:

Single: 75x105x60 mm.

Charging rack for 3 torches: 205x105x60 mm.

Charging rack for 5 torches: 405x105x60 mm.




www.adalite.es



European
high quality

ADALIT
professional



●●● The Light Company
ADARO

ADARO Tecnología, S.A.
Parque Científico y Tecnológico de Gijón
-EDIFICIO ADARO-
33203 GIJÓN-ASTURIAS-SPAIN

Customer Service:
Tel.: +34 985 347 806
Fax: +34 985 358 378
info@adalit.es