FLAMEPROOF CP../CPS.. Series junction boxes



The CP../CPS.. range of enclosures, used for terminals wiring, grants Ex-d or Ex-e mode of protection.

Boxes are manufactured in aluminium with low content of copper and complete with threaded hubs suitable for cable glands or conduit, connection does not affect the internal void, which remains available for terminals wiring.

Internal and external screws are made of AISI316 stainless steel.

This series is taylor made on the base of customer specification, including quantity and type of operators.

Based on the customer's needs and certificate requirements, our technical department will advise and select the most suitable combination.

These boxes are suitable for hazardous areas of industrial plants for indoor and outdoor applications.

TECHNICAL FEATURES

Material Aluminium with low content of copper

IP rating IP66

Ambient temperature

range

-50°C to +60°C

Approvals INERIS 03ATEX0009

IECEX BKI 15.0002

GOST R

Marking STANDARD

II 2 GD

Ex-d IIC T(*) Gb Ex-tb IIIC T(*) Db IP66

* T6/T85°C, T5/T100°C, T4/T135°C

II 2 GD

Ex-e IIC T(*) Gb Ex-t IIIC T(*) Db IP66 * T6/T85°C, T5/T100°C

Surface treatment Painted by green colour polyurethane painting cycle RAL6003 (other colour available upon

request)

Thread Metric pitch 1.5, ANSI B1.20.1 NPT, UNI-6125

Standard certificate label Made by self adhesive UV and corrosion resistant polyester, approved by INERIS Laboratory.

Accessories available upon request

Internal anticondensate painting

Traffolyte/Stainless steel certificate label


Terminals

Maximum number of

terminals

 $(15 \times 2.5 \text{ mm}^2 / 12 \times 4 \text{ mm}^2 / 8 \times 6 \text{ mm}^2)$

Dimensions CP../CPS..

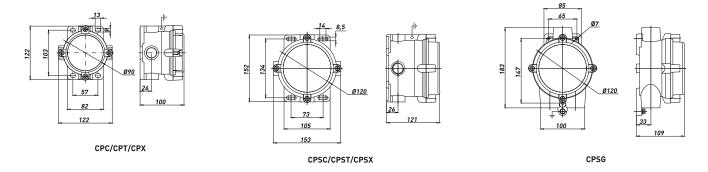

CP.. Series (Selection table)

N° OF ENTRIES	TYPE	COLOUR
2	CPC-26 2XM25	RAL6003
	CPC-26 2X3/4"GK	RAL6003
	CPC-26 2X3/4"NPT	RAL6003
3 ———	CPT-26 3XM25	RAL6003
	CPT-26 3X3/4"GK	RAL6003
	CPT-26 3X3/4"NPT	RAL6003
4 —	CPX-26 4XM25	RAL6003
	CPX-26 4X3/4"GK	RAL6003
	CPX-26 4X3/4"NPT	RAL6003

For complete junction boxes is necessary to ask to the Sales Office.

CPS.. Series (Selection table)

N° OF EN	TRIES TYPE	COLOUR
2	CPSC 2XM25	RAL6003
	CPSC 2XM32	RAL6003
	CPSC 2X3/4" (RAL6003
	CPSC 2X3/4" N	IPT RAL6003
	CPSC 2X1" GK	RAL6003
	CPSC 2X1" NF	T RAL6003
3 ———	CPST 3XM25	RAL6003
	CPST 3XM32	RAL6003
	CPST 3X3/4" 0	K RAL6003
	CPST 3X3/4" N	IPT RAL6003
	CPST 3X1" GK	RAL6003
	CPST 3X1" NP	T RAL6003
3	CPSG 3XM25	RAL6003
	CPSG 3XM32	RAL6003
	CPSG 3X3/4" (RAL6003
	CPSG 3X3/4" N	NPT RAL6003
	CPSG 3X1" GK	RAL6003
	CPSG 3X1" NF	T RAL6003
4 —	CPSX 4XM25	RAL6003
	CPSX 4XM32	RAL6003
	CPSX 4X3/4" 0	K RAL6003
	CPSX 4X3/4" N	IPT RAL6003
	CPSX 4X1" GK	RAL6003
	CPSX 4X1" NP	T RAL6003

For complete junction boxes is necessary to ask to the Sales Office.